

Thin-Double sided tape


<ISR-MK series> ISR-MK10G

Technical Data

■ Application

- 1) Fixing Thin-mobile device.
- 2) Fixing flat-panel display

■ Construction

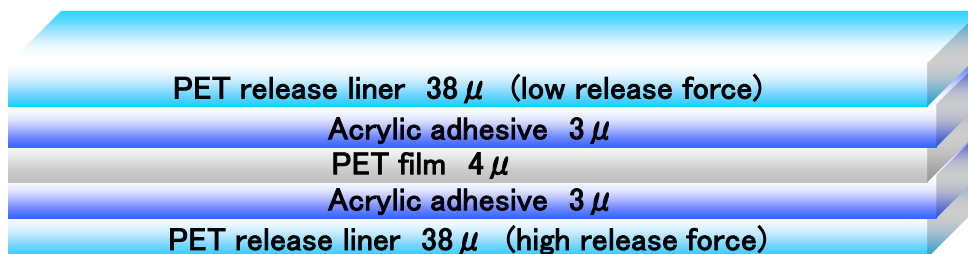

■ Characteristic

- 1) Total thickness : 10 μ m
- 2) Highly strong adhesive strength with thin thickness. Attach to various adherend.
- 3) The hard adhesive are suitable for die-cutting.
- 4) The low tackiness are adopted to reworkability.

■ General properties

item	Measured figure	Unit	Adherend
Adhesive strength	9.3	N/25mm	SUS
	8.5	N/25mm	Glass
	8.8	N/25mm	PC sheet
Ball tackiness	2.0 or less	—	Ball No.
Holding force	0.0	mm	*

* Test method : •Based on JIS Z0237

•180° Peel •Peel speed 300mm/min •Test condition 23°C*50%RH

* Holding force : Measure the range of scooting out in 1kg load/40°C circumstances after 1hr.

The table shows typical data and cannot be deemed as guaranteed value.

Iwatani

Iwatani Corporation

ELECTRONIC MATERIALS DEPT.
21-8, NISHI-SHIMBASHI 3-CHOME,
MINATO-KU, TOKYO 105-8458, JAPAN

Tel: 03-5405-5797
Fax: 03-5405-5685

ZHONGSHAN IWATANI CO., LTD.

BAIXI INDUSTRY ZONE, BANFU
TOWN, ZHONGSHANG CITY,
GUANGDONG, CHINA

Tel: 86-760-23618605
Fax: 86-760-23618646

Suzhou ISR e-Films Co., Ltd.

JINJIAN, CHENGQU INDUSTRIAL PARK,
CHENGXIANG, TAICANG, JIANGSU,
CHINA

Tel: 86-512-53103245
Fax: 86-512-53103246